

# U

# U55-4


# SPECIFICATIONS

## Specifications

Model		U55-4		
Type of ROPS / FOPS		Canopy / Cab		
Type of tracks		Rubber / Steel		
Engine	Model	Kubota V2607-DI		
	Output (SAEJ 1995 gross)	HP (kW)/rpm	47.6 (35.5) / 2200	
	Output (SAEJ 1349 net)	HP (kW)/rpm	45.4 (33.8) / 2200	
	Displacement	cc	2615	
Dimensions	Overall length	mm	5500	
	Overall height	mm	2550	
	Overall width	mm	1960	
	Min. ground clearance	mm	310	
Hydraulic system	Pump capacity	ℓ /min	56.1 variable x 2 / 37.0 Gear x 1	
	Auxiliary hydraulic flow	Left / Right ℓ /min	37 / 75	
	Max. breakout force	Bucket / Arm kgf	4315 / 2770	
Drive system	Travel speed	Rubber Low / High	km/h	2.8 / 4.9
		Steel Low / High	km/h	2.6 / 4.6
	Max. traction force	Low speed	kgf	6567
	Tumbler distance	mm	1990	
	Crawler length	mm	2500	
	Shoe width	Rubber / Steel	mm	400
	Ground contact pressure	Rubber	kPa (kgf/cm <sup>2</sup> )	30.4 (0.310) / 30.9 (0.315)
Steel		kPa (kgf/cm <sup>2</sup> )	31.0 (0.316) / 31.5 (0.321)	
Swing system	Unit swing speed	rpm	9.3	
	Boom swing angle	Left / Right degree	70 / 55	
Blade	Dimensions	Width	mm	1960
		Height	mm	410
	Max. lift above ground	mm	440	
	Max. drop below ground	mm	405	
Hydraulic oil (Reservoir/System)		ℓ	45 / 79	
Fuel reservoir		ℓ	68	
Operating weight (Including operator's weight @ 75 kgs.)	Rubber	kgs	5375 / 5465	
	Steel	kgs	5475 / 5565	

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty information. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt for almost all applications.

## DIMENSIONS

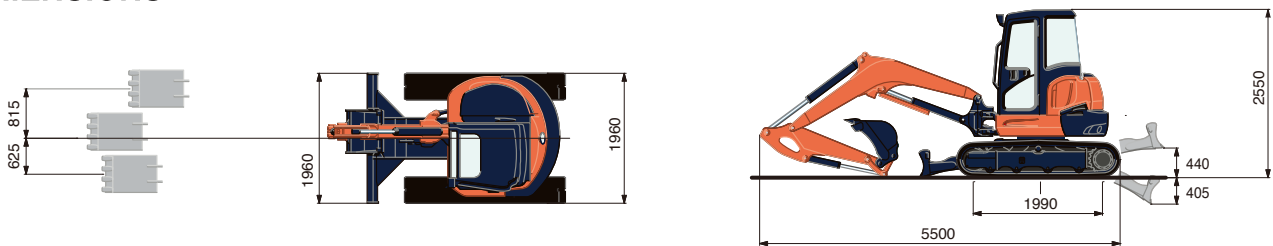

Unit: mm